

ALTOS® Low-Temperature, Loose Tube, Gel-Free, Double-Jacket, Single-Armored Cable

60 F, Single-mode (OS2)

CORNING

Corning ALTOS® gel-free, low-temperature cables are designed for extreme cold temperature environments with an extended operating range of -50° to +70°C (-58° to +158°F). Armored jackets allow for duct, direct-buried or aerial (lashed) installation.

Features and Benefits

Extended operating temperature range of -50° to +70°C (-58° to +158°F)

Allows for operation at extreme low temperatures

Flexible, craft-friendly buffer tubes

Facilitate easy routing in closures

Gel-free waterblocking technology

Craft-friendly cable preparation

Dielectric central strength member

No preferential bend and requires no bonding or grounding



Medium-density polyethylene jacket

Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

Standards

Approvals and Listings USDA Rural Development Programs

Design and Test Criteria ANSI/ICEA S-87-640

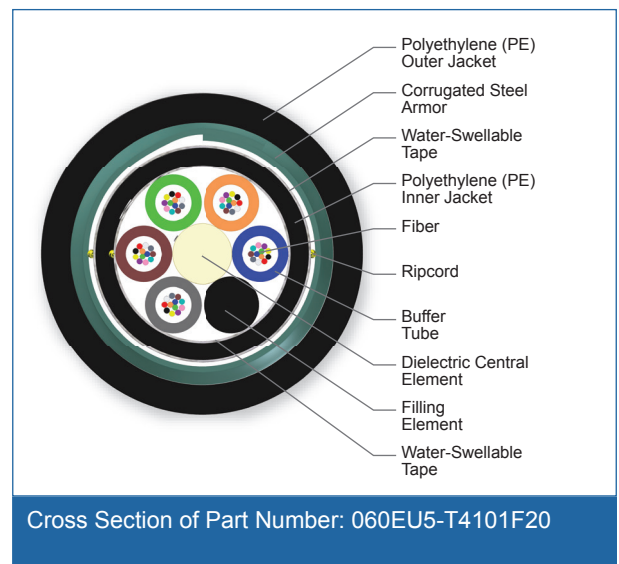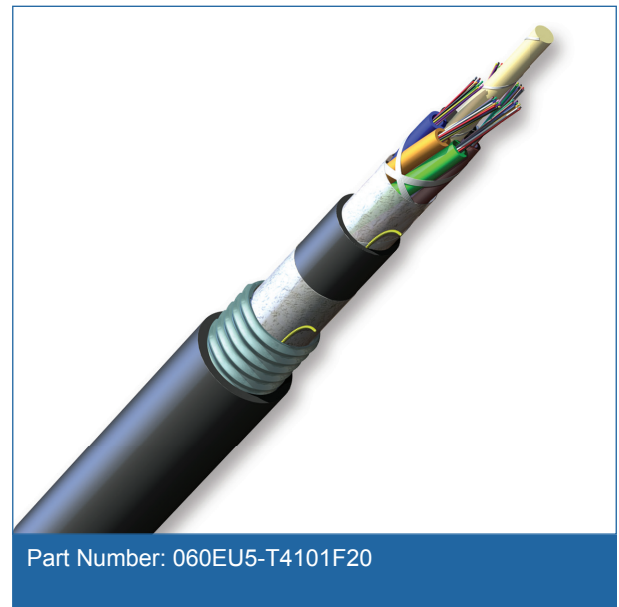

ALTOS® Low-Temperature, Loose Tube, Gel-Free, Double-Jacket, Single-Armored Cable

60 F, Single-mode (OS2)

CORNING

Specifications

General Specifications

Environment	Outdoor
Application	Aerial, Direct Buried
Cable Type	Loose Tube
Product Type	Armored
Fiber Category	Single-mode (OS2)

Temperature Range

Storage	-50 °C to 70 °C (-58 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-50 °C to 70 °C (-58 °F to 158 °F)

Cable Design

Central Element	Dielectric
Fiber Count	60
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Number of Tube Positions	6
Number of Active Tubes	5
Buffer Tube Color Coding	Blue, Orange, Green, Brown, Slate
Buffer Tube Diameter	2.5 mm (0.1 in)
Number of Filling Elements	1
Tape	Water-swellaible
Inner Jacket Material	Polyethylene (PE)
Tape, Layer 2	Water-swellaible
Tensile Strength Elements and/or Armoring - Layer 1	Corrugated steel tape armor
Number of Ripcords	3
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black

Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	890 N (200 lbf)
Weight	172 kg/km (115 lb/1000 ft)

ALTOS® Low-Temperature, Loose Tube, Gel-Free, Double-Jacket, Single-Armored Cable

60 F, Single-mode (OS2)

CORNING

Mechanical Characteristics Cable

Nominal Outer Diameter	14.3 mm (0.56 in)
Min. Bend Radius Installation	215 mm (8.4 in)
Min. Bend Radius Operation	143 mm (5.6 in)

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Fiber Specifications

Optical Characteristics (cabled)

Fiber Name	Single-mode (OS2)
Fiber Category	G.652.D
Fiber Code	E
Performance Option Code	01
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km

Ordering Information

Part Number	060EU5-T4101F20
Product Description	ALTOS® Low-Temperature, Loose Tube, Gel-Free, Double-Jacket, Single-Armored Cable, 60 F, Single-mode (OS2)
EAN Code	4056418159133



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

CORNING