

# ALTOS® Lite™ Loose Tube, Gel-Free, Double-Jacket, Double-Armored Cable

60 F, 62.5 μm multimode (OM1)

CORNING

Corning ALTOS® Lite™ gel-free double-jacket, double-armored cables are rugged cables designed for direct-buried installations. The loose tube design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber.

## Features and Benefits

**Two jacket layers and two steel tape armor layers**  
Provides superior rodent resistance for direct-buried applications

**Flexible, craft-friendly buffer tubes**  
Facilitate easy routing in closures

**Gel-free waterblocking technology**  
Craft-friendly cable preparation



**Medium-density polyethylene jacket**  
Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

**Exceeds the RDUP requirements for mid-span buffer tube slack storage**  
Provides flexibility for mid-span access applications

## Standards

**Approvals and Listings**     USDA Rural Development Programs

**Design and Test Criteria**     ANSI/ICEA S-87-640

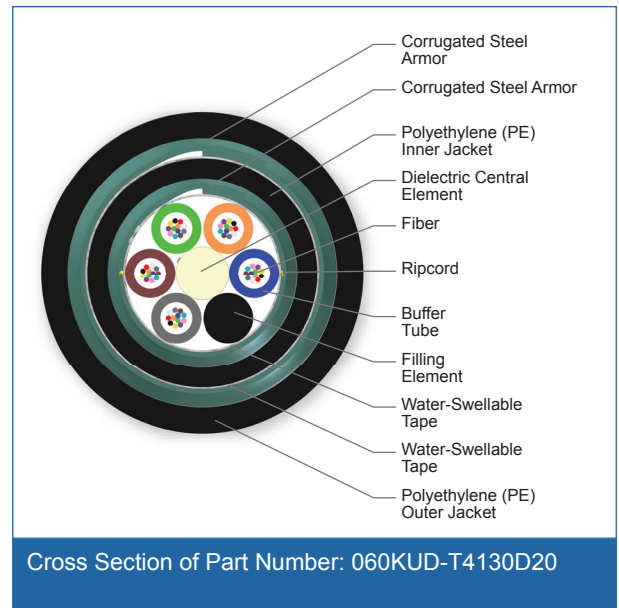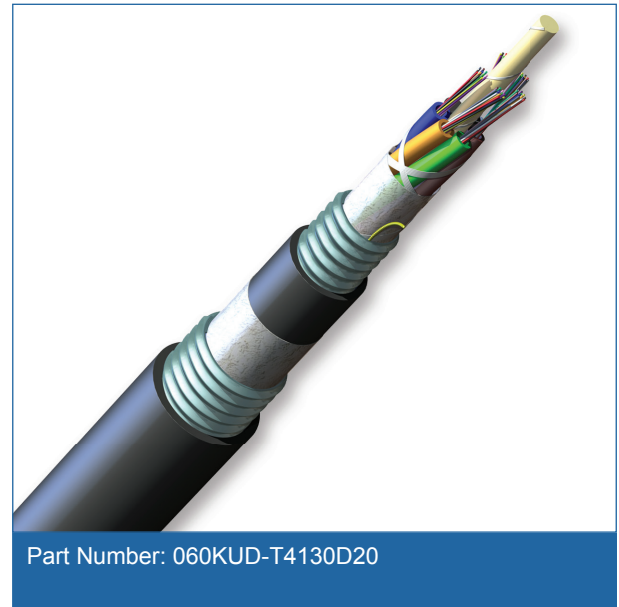

# ALTOS® Lite™ Loose Tube, Gel-Free, Double-Jacket, Double-Armored Cable

60 F, 62.5 µm multimode (OM1)

CORNING

## Specifications

General Specifications	
Environment	Outdoor
Application	Direct Buried
Cable Type	Loose Tube
Product Type	Armored
Fiber Category	62.5 µm MM (OM1)

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design	
Central Element	Dielectric
Fiber Count	60
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	6
Number of Active Tubes	5
Buffer Tube Color Coding	Blue, Orange, Green, Brown, Slate
Buffer Tube Diameter	2.5 mm (0.1 in)
Tape	Water-swellaable
Number of Filling Elements	1
Tensile Strength Elements and/or Armoring - Layer 1	Corrugated steel tape armor
Inner Jacket Material	Polyethylene (PE)
Tape, Layer 2	Water-swellaable
Number of Ripcords	4
Tensile Strength Elements and/or Armoring - Layer 2	Corrugated steel tape armor
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black
Maximum Fibers per Tube	12

# ALTOS® Lite™ Loose Tube, Gel-Free, Double-Jacket, Double-Armored Cable

60 F, 62.5 µm multimode (OM1)

CORNING

## Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	890 N (200 lbf)
Weight	247 kg/km (166 lb/1000 ft)
Nominal Outer Diameter	16.1 mm (0.63 in)
Min. Bend Radius Installation	242 mm (9.5 in)
Min. Bend Radius Operation	161 mm (6.3 in)

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

## Fiber Specifications

### Optical Characteristics (cabled)

Fiber Core Diameter	62.5 µm
Fiber Category	OM1
Fiber Code	K
Performance Option Code	30
Wavelengths	850 nm / 1300 nm
Maximum Attenuation	3.4 dB/km / 1.0 dB/km
Serial 1 Gigabit Ethernet	300 m / 550 m
Serial 10 Gigabit Ethernet	33 m / -
Min. Overfilled Launch (OFL) Bandwidth	200 MHz*km / 500 MHz*km
Minimum Effective Modal Bandwidth (EMB)	220 MHz*km / -

Notes: 1) Improved attenuation and bandwidth options available.  
2) Bend-insensitive single-mode fibers available on request.  
3) Contact a Corning Customer Care Representative for additional information.

## Ordering Information

Part Number	060KUD-T4130D20
Product Description	ALTOS® Lite™ Loose Tube, Gel-Free, Double-Jacket, Double-Armored Cable, 60 F, 62.5 µm multimode (OM1)

# ALTOS® Lite™ Loose Tube, Gel-Free, Double-Jacket, Double-Armored Cable

60 F, 62.5 µm multimode (OM1)

The CORNING logo is displayed in white, uppercase letters within a solid blue square.

## Notes



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks).

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

The CORNING logo is displayed in a large, bold, black, sans-serif font.