

# ALTOS® Loose Tube, Gel-Free, Double-Jacket Cable

60 F, 62.5 µm multimode (OM1)

CORNING

Corning ALTOS® gel-free double-jacket, dielectric cables are designed for duct and aerial (lashed) installation. The double-jacket construction adds a layer of protection for harsh environments. The loose tube cable design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber.

## Features and Benefits

### Two jacket layers

Provides extra protection in harsh environments

### Flexible, craft-friendly buffer tubes

Facilitate easy routing in closures

### Gel-free waterblocking technology

Craft friendly cable preparation

### Medium-density polyethylene jacket

Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)



### Exceeds the RDUP requirements for mid-span buffer tube slack storage

Provides flexibility for mid-span access applications

## Standards

<b>Approvals and Listings</b>	<b>RDUP (RUS) Listed</b> Material acceptability
-------------------------------	--

<b>Design and Test Criteria</b>	ANSI/ICEA S-87-640
---------------------------------	--------------------

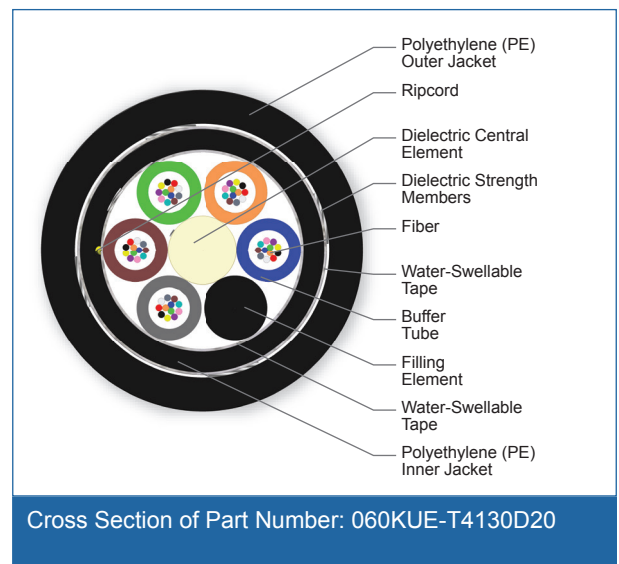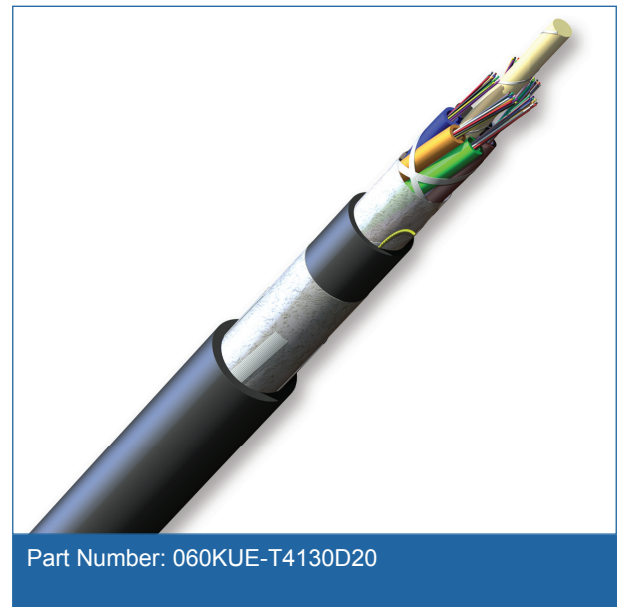

# ALTOS<sup>®</sup> Loose Tube, Gel-Free, Double-Jacket Cable

60 F, 62.5 µm multimode (OM1)

CORNING

## Specifications

General Specifications	
Environment	Outdoor
Application	Aerial, Duct
Cable Type	Loose Tube
Product Type	Dielectric
Fiber Category	62.5 µm MM (OM1)

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design	
Central Element	Dielectric
Fiber Count	60
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	6
Number of Active Tubes	5
Buffer Tube Color Coding	Blue, Orange, Green, Brown, Slate
Buffer Tube Diameter	2.5 mm (0.1 in)
Number of Filling Elements	1
Tape	Water-swellable
Inner Jacket Material	Polyethylene (PE)
Tape, Layer 2	Water-swellable
Number of Ripcords	1
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black
Maximum Fibers per Tube	12

# ALTOS® Loose Tube, Gel-Free, Double-Jacket Cable

60 F, 62.5 µm multimode (OM1)

CORNING

## Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	890 N (200 lbf)
Weight	107 kg/km (72 lb/1000 ft)
Nominal Outer Diameter	12.5 mm (0.49 in)
Min. Bend Radius Installation	188 mm (7.4 in)
Min. Bend Radius Operation	125 mm (4.9 in)

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

## Fiber Specifications

### Optical Characteristics (cabled)

Fiber Core Diameter	62.5 µm
Fiber Category	OM1
Fiber Code	K
Performance Option Code	30
Wavelengths	850 nm / 1300 nm
Maximum Attenuation	3.4 dB/km / 1.0 dB/km
Serial 1 Gigabit Ethernet	300 m / 550 m
Serial 10 Gigabit Ethernet	33 m / -
Min. Overfilled Launch (OFL) Bandwidth	200 MHz*km / 500 MHz*km
Minimum Effective Modal Bandwidth (EMB)	220 MHz*km / -

Notes: 1) Improved attenuation and bandwidth options available.  
2) Bend-insensitive single-mode fibers available on request.  
3) Contact a Corning Customer Care Representative for additional information.

## Ordering Information

Part Number	060KUE-T4130D20
Product Description	ALTOS® Loose Tube, Gel-Free, Double-Jacket Cable, 60 F, 62.5 µm multimode (OM1)
EAN Code	4056418146652

# ALTOS<sup>®</sup> Loose Tube, Gel-Free, Double-Jacket Cable

60 F, 62.5  $\mu\text{m}$  multimode (OM1)

The CORNING logo is displayed in white, uppercase letters within a solid blue square.

## Notes



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks).

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.