

MIC® Unitized Tight-Buffered Cable, Plenum


72 F, Single-mode (OS2)

CORNING

Corning MIC® unitized plenum cables are designed for use in plenum, riser and general purpose environments for intrabuilding backbone installations. These multifiber cables use individually jacketed 900 µm buffered fibers enabling easy, consistent stripping and facilitating termination. The stranded subunits of 6-, 12-, or 24-fibers allow quick and easy identification and are surrounded by dielectric strength members and protected by a flame-retardant outer jacket.

The all-dielectric cable construction requires no grounding or bonding, making these cables ideal for routing inside buildings including riser shafts, to the telecommunications rooms and workstations. The MIC Unitized Riser Cables meet the application requirements of the National Electrical Code® (NEC®) Article 770 and the ICEA S-83-596 test criteria. They are OFNP and FT-6 listed.

This cable is available in 12 different jacket colors – blue, orange, green, brown, slate, white, red, black, yellow, violet, rose and aqua. The colored jacket allows for easy visual identification of the cables. The standard jacket color will be determined by the dominant fiber type in the cable and will use the standard part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.

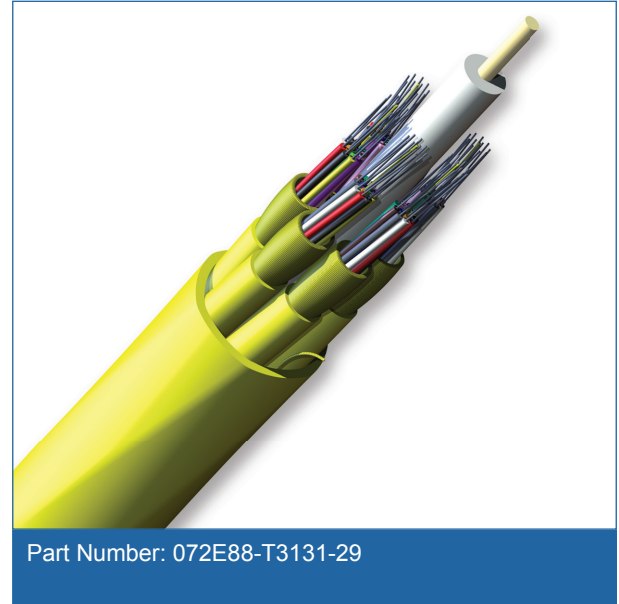

Features and Benefits

900 µm Buffered Fibers

Easy, consistent stripping

6- or 12-fiber jacketed subunits


Quick and easy identification

All-dielectric construction

Requires no grounding or bonding

Flame-retardant jacket

Rugged and durable

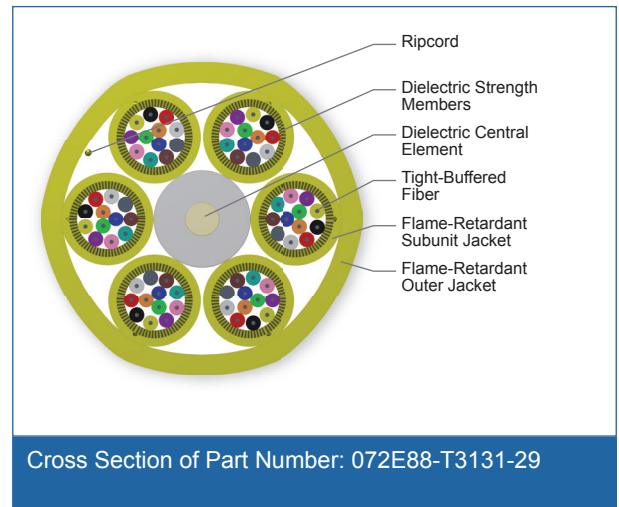

Standards

Approvals and Listings

National Electrical Code® (NEC®) OFNP, CSA FT-6, ICEA S-83-596

Flame Resistance

NFPA 262 (for plenum, riser and general building applications)

CORNING

MIC[®] Unitized Tight-Buffered Cable, Plenum

72 F, Single-mode (OS2)

CORNING

Specifications

General Specifications	
Environment	Indoor
Application	General Purpose Horizontal, Vertical Riser, Plenum
Cable Type	Tight-Buffered
Product Type	Distribution
Flame Rating	Plenum (OFNP)
Fiber Category	Single-mode (OS2)

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	0 °C to 60 °C (32 °F to 140 °F)
Operation	0 °C to 70 °C (32 °F to 158 °F)

Cable Design	
Central Element	Jacketed GRP
Fiber Count	72
Number of Active Tubes	6
Subunit Color	Yellow
Number of Fibers per Subunit	12
Subunit Diameter	5.55 mm (0.22 in)
Tight buffer color subunit	Blue, Orange, Green
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Tight Buffer Color Subunit, Layer 2	Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Number of Ripcords	7
Outer Jacket Material	Flame-retardant
Outer Jacket Color	Yellow

Mechanical Characteristics Cable	
Max. Tensile Strength, Short-Term	660 N (150 lbf)
Max. Tensile Strength, Long-Term	200 N (45 lbf)
Nominal Outer Diameter	18.6 mm (0.73 in)
Weight	317.7 kg/km (213.5 lb/1000 ft)

MIC[®] Unitized Tight-Buffered Cable, Plenum

72 F, Single-mode (OS2)

CORNING

Mechanical Characteristics Cable

Min. Bend Radius Installation	279 mm (11.0 in)
Min. Bend Radius Operation	186 mm (7.3 in)

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Fiber Specifications

Optical Characteristics (cabled)

Fiber Name	SMF-28e [®] fiber
Fiber Category	G.652.D
Fiber Code	E
Performance Option Code	31
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.65 dB/km / 0.65 dB/km / 0.50 dB/km

Ordering Information

Part Number	072E88-T3131-29
Product Description	MIC [®] Unitized Tight-Buffered Cable, Plenum, 72 F, Single-mode (OS2)
EAN Code	4056418190488



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

CORNING