

ALTOS® Lite™ Low-Temperature, Loose Tube, Gel-Filled, Single-Jacket, Single-Armored Cable

72 F, 62.5 μm multimode (OM1)

CORNING

Corning ALTOS® low-temperature cables are designed for extreme cold temperature environments with an extended operating range of -50° to +70°C (-58° to +158°F). Dielectric and armored jackets allow for duct, direct-buried or aerial (lashed) installation.

Features and Benefits

Extended operating temperature range of -50° to +70°C (-58° to +158°F)

Allows for operation at extreme low temperatures

Flexible, craft-friendly buffer tubes

Facilitate easy routing in closures

Innovative waterblocking design

Provides efficient and craft-friendly cable preparation

SZ-stranded, loose tube design

Isolates fibers from installation and environmental rigors and facilitates mid-span access

Dielectric central strength member

No preferential bend and requires no bonding or grounding

Medium-density polyethylene jacket



Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

Standards

Approvals and Listings USDA Rural Development Programs

Common Installations Designed for Direct-Buried and Aerial Applications

Design and Test Criteria Telcordia GR-20, ICEA-640

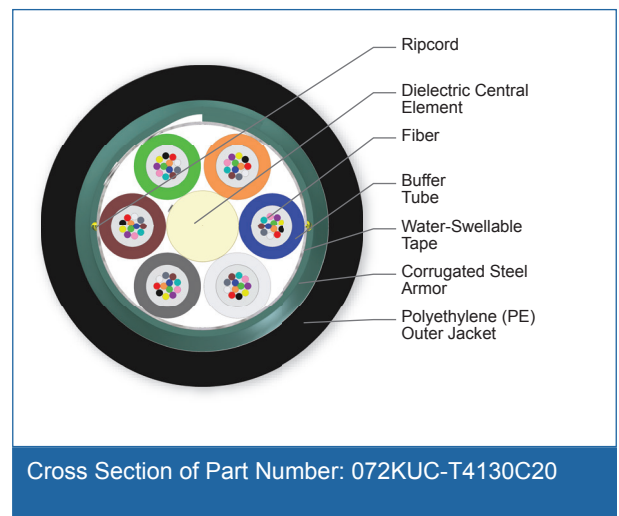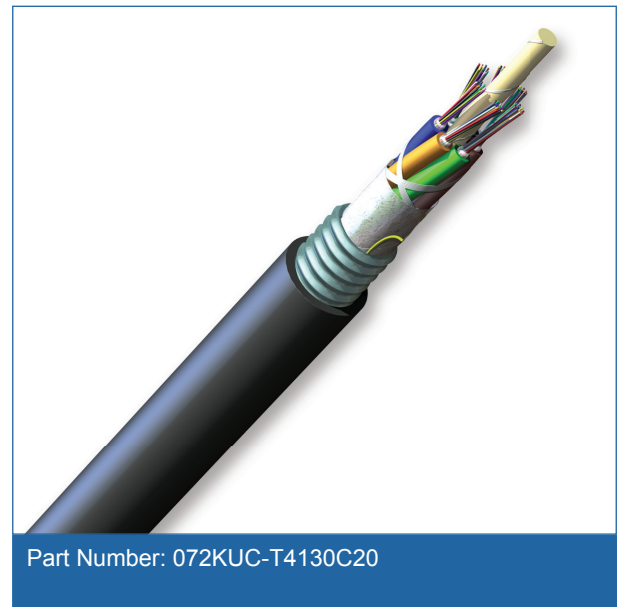

Specifications

General Specifications	
Environment	Outdoor
Application	Aerial, Direct Buried, Duct
Cable Type	Loose Tube

ALTOS® Lite™ Low-Temperature, Loose Tube, Gel-Filled, Single-Jacket, Single-Armored Cable

72 F, 62.5 µm multimode (OM1)

CORNING

General Specifications

Product Type	Armored
Fiber Category	62.5 µm MM (OM1)

Temperature Range

Storage	-50 °C to 70 °C (-58 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-50 °C to 70 °C (-58 °F to 158 °F)

Cable Design

Central Element	Dielectric
Fiber Count	72
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	6
Number of Active Tubes	6
Buffer Tube Color Coding	Blue, Orange, Green, Brown, Slate, White
Buffer Tube Diameter	2.5 mm (0.1 in)
Tape	Water-swellable
Inner Jacket Material	Polyethylene (PE)
Tape, Layer 2	Water-swellable
Tensile Strength Elements and/or Armoring - Layer 1	Corrugated steel tape armor
Number of Ripcords	3
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black

Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	890 N (200 lbf)
Weight	136 kg/km (91 lb/1000 ft)
Nominal Outer Diameter	12.1 mm (0.48 in)
Min. Bend Radius Installation	182 mm (7.1 in)
Min. Bend Radius Operation	121 mm (4.8 in)

ALTOS® Lite™ Low-Temperature, Loose Tube, Gel-Filled, Single-Jacket, Single-Armored Cable

72 F, 62.5 µm multimode (OM1)

CORNING

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Fiber Specifications

Optical Characteristics (cabled)

Fiber Core Diameter	62.5 µm
Fiber Category	OM1
Fiber Code	K
Performance Option Code	30
Wavelengths	850 nm / 1300 nm
Maximum Attenuation	3.4 dB/km / 1.0 dB/km
Serial 1 Gigabit Ethernet	300 m / 550 m
Serial 10 Gigabit Ethernet	33 m / -
Min. Overfilled Launch (OFL) Bandwidth	200 MHz*km / 500 MHz*km
Minimum Effective Modal Bandwidth (EMB)	220 MHz*km / -

Notes: 1) Improved attenuation and bandwidth options available.
2) Bend-insensitive single-mode fibers available on request.
3) Contact a Corning Customer Care Representative for additional information.

Ordering Information

Part Number	072KUC-T4130C20
Product Description	ALTOS® Lite™ Low-Temperature, Loose Tube, Gel-Filled Single-Jacket, Single-Armored Cable, 72 F, 62.5 µm multimode (OM1)
EAN Code	4056418158136



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

CORNING