

# ALTOS® Lite™ Low-Temperature, Loose Tube, Gel-Filled, Single-Jacket, Single-Armored Cable

96 F, Single-mode (OS2)

CORNING

Corning ALTOS® low-temperature cables are designed for extreme cold temperature environments with an extended operating range of -50° to +70°C (-58° to +158°F). Dielectric and armored jackets allow for duct, direct-buried or aerial (lashed) installation.

## Features and Benefits

**Extended operating temperature range of -50° to +70°C (-58° to +158°F)**

Allows for operation at extreme low temperatures

**Flexible, craft-friendly buffer tubes**

Facilitate easy routing in closures

**Innovative waterblocking design**

Provides efficient and craft-friendly cable preparation

**SZ-stranded, loose tube design**

Isolates fibers from installation and environmental rigors and facilitates mid-span access

**Dielectric central strength member**

No preferential bend and requires no bonding or grounding

**Medium-density polyethylene jacket**


Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

## Standards


**Approvals and Listings** USDA Rural Development Programs

**Common Installations** Designed for Direct-Buried and Aerial Applications

**Design and Test Criteria** Telcordia GR-20, ICEA-640

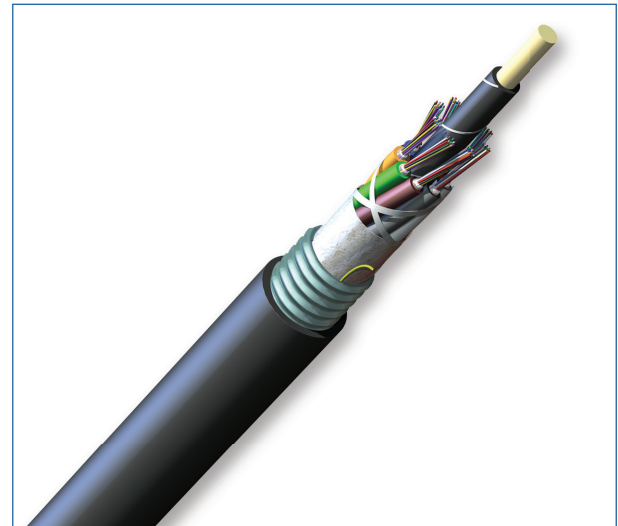

Part Number: 096EUC-T4101C20

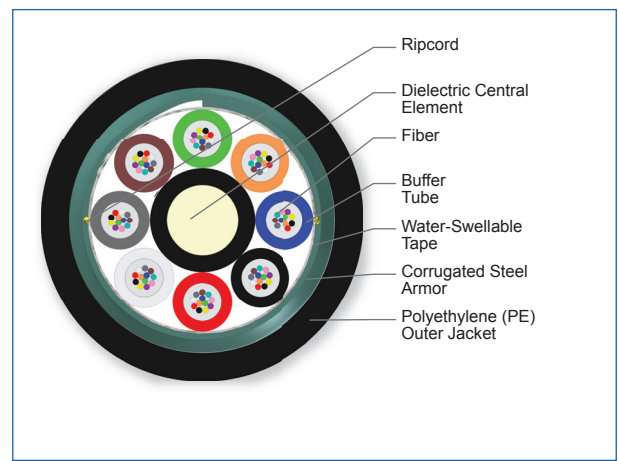

Cross Section of Part Number: 096EUC-T4101C20

## Specifications

### General Specifications

Environment	Outdoor
Application	Aerial, Direct Buried, Duct
Cable Type	Loose Tube

CORNING

# ALTOS® Lite™ Low-Temperature, Loose Tube, Gel-Filled, Single-Jacket, Single-Armored Cable

96 F, Single-mode (OS2)

CORNING

## General Specifications

Product Type	Armored
Fiber Category	Single-mode (OS2)

## Temperature Range

Storage	-50 °C to 70 °C (-58 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-50 °C to 70 °C (-58 °F to 158 °F)

## Cable Design

Central Element	Dielectric
Fiber Count	96
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	8
Number of Active Tubes	8
Buffer Tube Color Coding	Blue, Orange, Green, Brown, Slate, White, Red, Black
Buffer Tube Diameter	2.5 mm (0.1 in)
Tape	Water-swellable
Inner Jacket Material	Polyethylene (PE)
Tape, Layer 2	Water-swellable
Tensile Strength Elements and/or Armoring - Layer 1	Corrugated steel tape armor
Number of Ripcords	3
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black

## Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	890 N (200 lbf)
Weight	173 kg/km (116 lb/1000 ft)
Nominal Outer Diameter	13.8 mm (0.54 in)
Min. Bend Radius Installation	207 mm (8.1 in)
Min. Bend Radius Operation	138 mm (5.4 in)

CORNING

# ALTOS® Lite™ Low-Temperature, Loose Tube, Gel-Filled, Single-Jacket, Single-Armored Cable

96 F, Single-mode (OS2)

CORNING

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

## Fiber Specifications

### Optical Characteristics (cabled)

Fiber Name	Single-mode (OS2)
Fiber Category	G.652.D
Fiber Code	E
Performance Option Code	01
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km

## Ordering Information

Part Number	096EUC-T4101C20
Product Description	ALTOS® Lite™ Low-Temperature, Loose Tube, Gel-Filled Single-Jacket, Single-Armored Cable, 96 F, Single-mode (OS2)
EAN Code	4056418168654



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

CORNING