


Ribbon Cable, Riser

144 F, Single-mode (OS2)

CORNING

Corning ribbon riser cables are all-dielectric and designed for indoor use. The optical fibers are organized into easily identifiable 12-fiber ribbons inside a central tube. The required tensile strength is provided by dielectric strength elements that are helically stranded around the central tube. The specially formulated, flame-retardant outer jacket and rugged construction of these cables facilitates routing through riser shafts and long horizontal runs inside buildings. These cables are tested using the UL 1666 flame test, meet the application requirements of the National Electrical Code (NEC) and are OFNR and FT-4 listed.

This cable is available in 12 different jacket colors – blue, orange, green, brown, slate, white, red, black, yellow, violet, rose and aqua. The colored jacket allows for easy visual identification of the cables. The standard jacket color will be determined by the dominant fiber type in the cable and will use the standard part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.

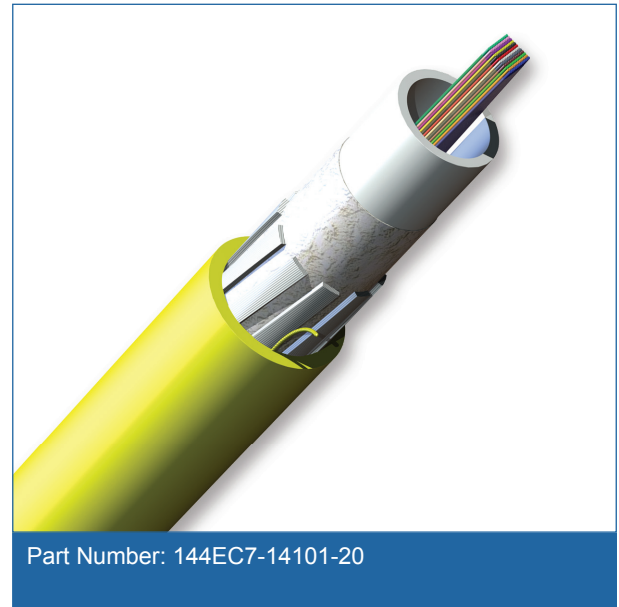

Features and Benefits

Precise fiber and ribbon geometries

Excellent mass splicing yields

Ribbon ID numbers and fiber colors


Easily identifiable

Flame-retardant jacket

Rugged and durable

Common installations

Indoor vertical riser and general purpose horizontal according to National Electrical Code® (NEC®) Article 770

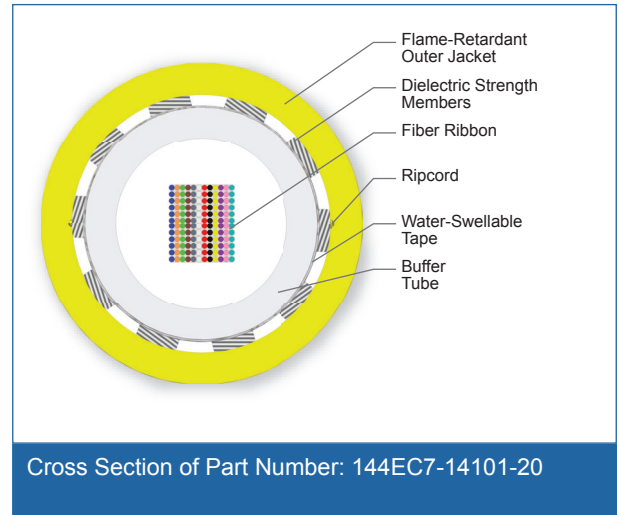

Standards

Listings	National Electrical Code® (NEC®) OFNR
Design Criteria	CSA FT-4
Test Criteria	ANSI/ICEA S-83-596

CORNING

Ribbon Cable, Riser

144 F, Single-mode (OS2)

CORNING

Specifications

General Specifications	
Environment	Indoor
Application	General Purpose Horizontal, Vertical Riser
Cable Type	Ribbon
Product Type	Distribution
Flame Rating	Riser (OFNR)
Fiber Category	Single-mode (OS2)

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-10 °C to 60 °C (14 °F to 140 °F)
Operation	-20 °C to 70 °C (-4 °F to 158 °F)

Cable Design	
Fiber Count	144
Ribbons per Tube	12
Fibers per Ribbon	12
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Buffer Tube Color	Natural
Buffer Tube Diameter	11 mm (0.43 in)
Tape	Water-swellable
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Number of Ripcords	2
Outer Jacket Material	Flame-retardant
Outer Jacket Color	Yellow

Mechanical Characteristics Cable	
Max. Tensile Strength, Short-Term	1320 N (300 lbf)
Max. Tensile Strength, Long-Term	400 N (90 lbf)
Nominal Outer Diameter	15.2 mm (0.60 in)
Min. Bend Radius Installation	228 mm (9.0 in)
Min. Bend Radius Operation	152 mm (6.0 in)
Weight	220 kg/km (159.1 lb/1000 ft)

CORNING

Ribbon Cable, Riser

144 F, Single-mode (OS2)



Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Fiber Specifications

Optical Characteristics (cabled)

Fiber Name	Single-mode (OS2)
Fiber Category	G.652.D
Fiber Code	E
Performance Option Code	01
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km

Ordering Information

Part Number	144EC7-14101-20
Product Description	Ribbon Cable, Riser, 144 F, Single-mode (OS2)
EAN Code	4056418197692



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks.

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

