

ALTOS® Loose Tube, Gel-Free, Double-Jacket Cable

144 F, Single-mode (OS2)

CORNING

Corning ALTOS® gel-free double-jacket, dielectric cables are designed for duct and aerial (lashed) installation. The double-jacket construction adds a layer of protection for harsh environments. The loose tube cable design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber.

Features and Benefits

Two jacket layers

Provides extra protection in harsh environments

Flexible, craft-friendly buffer tubes

Facilitate easy routing in closures

Gel-free waterblocking technology

Craft friendly cable preparation

Medium-density polyethylene jacket

Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)



Exceeds the RDUP requirements for mid-span buffer tube slack storage

Provides flexibility for mid-span access applications

Standards

Approvals and Listings	RDUP (RUS) Listed Material acceptability
-------------------------------	--

Design and Test Criteria	ANSI/ICEA S-87-640
---------------------------------	--------------------

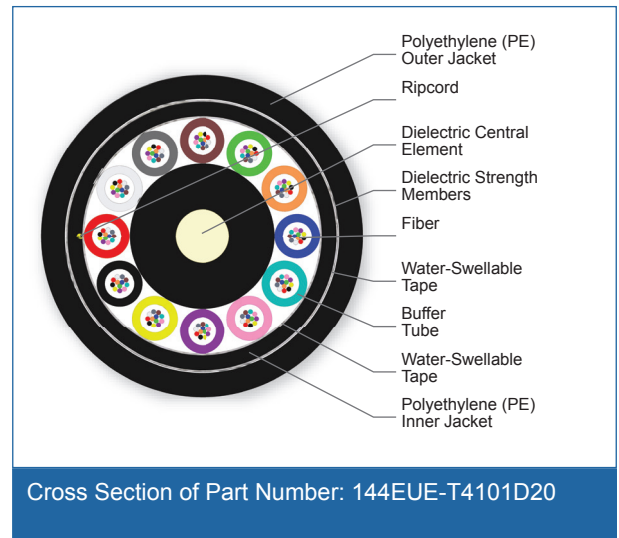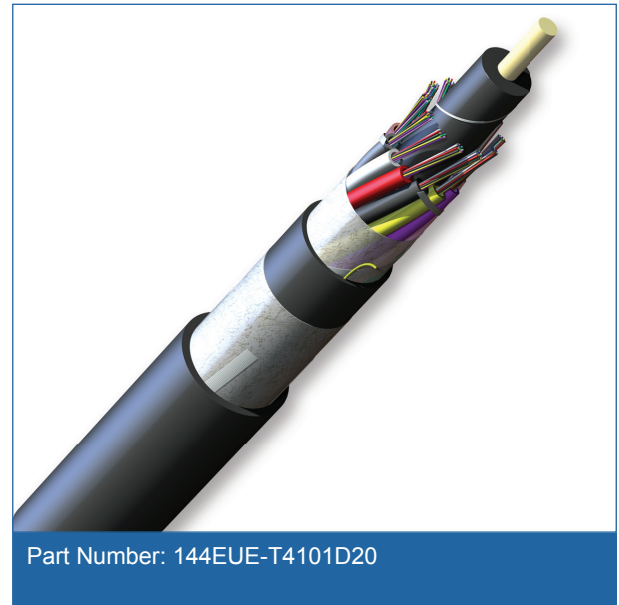

ALTOS[®] Loose Tube, Gel-Free, Double-Jacket Cable

144 F, Single-mode (OS2)

CORNING

Specifications

General Specifications	
Environment	Outdoor
Application	Aerial, Duct
Cable Type	Loose Tube
Product Type	Dielectric
Fiber Category	Single-mode (OS2)

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design	
Central Element	Dielectric
Fiber Count	144
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	12
Number of Active Tubes	12
Buffer Tube Color Coding	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Buffer Tube Diameter	2.5 mm (0.1 in)
Tape	Water-swellable
Inner Jacket Material	Polyethylene (PE)
Tape, Layer 2	Water-swellable
Number of Ripcords	1
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black
Maximum Fibers per Tube	12

ALTOS® Loose Tube, Gel-Free, Double-Jacket Cable

144 F, Single-mode (OS2)

CORNING

Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	890 N (200 lbf)
Weight	209 kg/km (140 lb/1000 ft)
Nominal Outer Diameter	17.7 mm (0.70 in)
Min. Bend Radius Installation	266 mm (10.5 in)
Min. Bend Radius Operation	177 mm (7 in)

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Fiber Specifications

Optical Characteristics (cabled)

Fiber Name	Single-mode (OS2)
Fiber Category	G.652.D
Fiber Code	E
Performance Option Code	01
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km

Ordering Information

Part Number	144EUE-T4101D20
Product Description	ALTOS® Loose Tube, Gel-Free, Double-Jacket Cable, 144 F, Single-mode (OS2)
EAN Code	4056418176796



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

CORNING