

# ALTOS® Low-Temperature, Loose Tube, Gel-Filled Cable

144 F, 62.5 µm multimode (OM1)

CORNING

Corning ALTOS® low-temperature cables are designed for extreme cold temperature environments with an extended operating range of -50° to +70°C (-58° to +158°F). Dielectric and armored jackets allow for duct, direct-buried or aerial (lashed) installation.

## Features and Benefits

**Extended operating temperature range of -50° to +70°C (-58° to +158°F)**

Allows for operation at extreme low temperatures

**Flexible, craft-friendly buffer tubes**

Facilitate easy routing in closures

**Innovative waterblocking design**

Provides efficient and craft-friendly cable preparation

**SZ-stranded, loose tube design**

Isolates fibers from installation and environmental rigors and facilitates mid-span access

**Dielectric central strength member**

No preferential bend and requires no bonding or grounding

**Medium-density polyethylene jacket**


Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

## Standards

**Approvals and Listings** USDA Rural Development Programs

**Common Installations** Designed for Duct and Aerial Applications

**Design and Test Criteria** Telcordia GR-20, ICEA-640

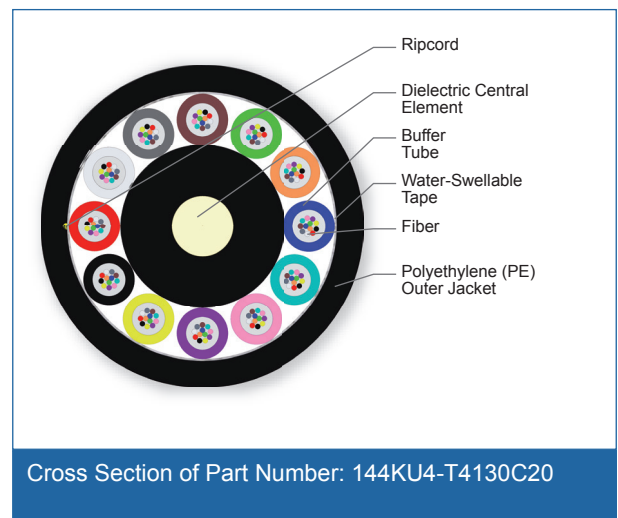

## Specifications

### General Specifications

Environment	Outdoor
Application	Aerial, Duct
Cable Type	Loose Tube

# ALTOS® Low-Temperature, Loose Tube, Gel-Filled Cable

144 F, 62.5 µm multimode (OM1)

CORNING

## General Specifications

Product Type	Dielectric
Fiber Category	62.5 µm MM (OM1)

## Temperature Range

Storage	-50 °C to 70 °C (-58 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-50 °C to 70 °C (-58 °F to 158 °F)

## Cable Design

Central Element	Dielectric
Fiber Count	144
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	12
Number of Active Tubes	12
Buffer Tube Color Coding	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Buffer Tube Diameter	2.5 mm (0.1 in)
Tape	Water-swellable
Number of Ripcords	2
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black

## Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	890 N (200 lbf)
Weight	177 kg/km (119 lb/1000 ft)
Nominal Outer Diameter	15.8 mm (0.62 in)
Min. Bend Radius Installation	237 mm (9.3 in)
Min. Bend Radius Operation	158 mm (6.2 in)

# ALTOS® Low-Temperature, Loose Tube, Gel-Filled Cable

144 F, 62.5 µm multimode (OM1)

CORNING

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

## Fiber Specifications

### Optical Characteristics (cabled)

Fiber Core Diameter	62.5 µm
Fiber Category	OM1
Fiber Code	K
Performance Option Code	30
Wavelengths	850 nm / 1300 nm
Maximum Attenuation	3.4 dB/km / 1.0 dB/km
Serial 1 Gigabit Ethernet	300 m / 550 m
Serial 10 Gigabit Ethernet	33 m / -
Min. Overfilled Launch (OFL) Bandwidth	200 MHz*km / 500 MHz*km
Minimum Effective Modal Bandwidth (EMB)	220 MHz*km / -

Notes: 1) Improved attenuation and bandwidth options available.  
2) Bend-insensitive single-mode fibers available on request.  
3) Contact a Corning Customer Care Representative for additional information.

## Ordering Information

Part Number	144KU4-T4130C20
Product Description	ALTOS® Low-Temperature, Loose Tube, Gel-Filled Cable, 144 F, 62.5 µm multimode (OM1)
EAN Code	4056418167749



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2017 Corning Optical Communications. All rights reserved.

CORNING