

ALTOS® Low-Temperature, Loose Tube, Gel-Free, Double-Jacket, Single-Armored Cable

192 F, 62.5 µm multimode (OM1)

CORNING

Corning ALTOS® gel-free, low-temperature cables are designed for extreme cold temperature environments with an extended operating range of -50° to +70°C (-58° to +158°F). Armored jackets allow for duct, direct-buried or aerial (lashed) installation.

Features and Benefits

Extended operating temperature range of -50° to +70°C (-58° to +158°F)

Allows for operation at extreme low temperatures

Flexible, craft-friendly buffer tubes

Facilitate easy routing in closures

Gel-free waterblocking technology

Craft-friendly cable preparation

Dielectric central strength member

No preferential bend and requires no bonding or grounding


Medium-density polyethylene jacket

Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)


Standards

Approvals and Listings USDA Rural Development Programs

Design and Test Criteria ANSI/ICEA S-87-640

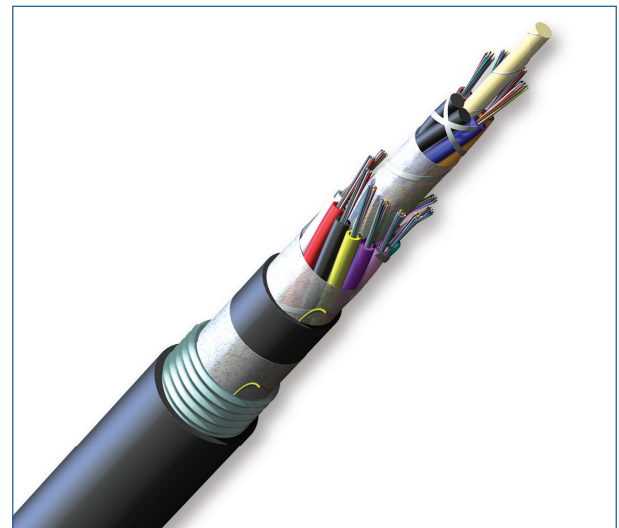

Part Number: 192KU5-T4130F20

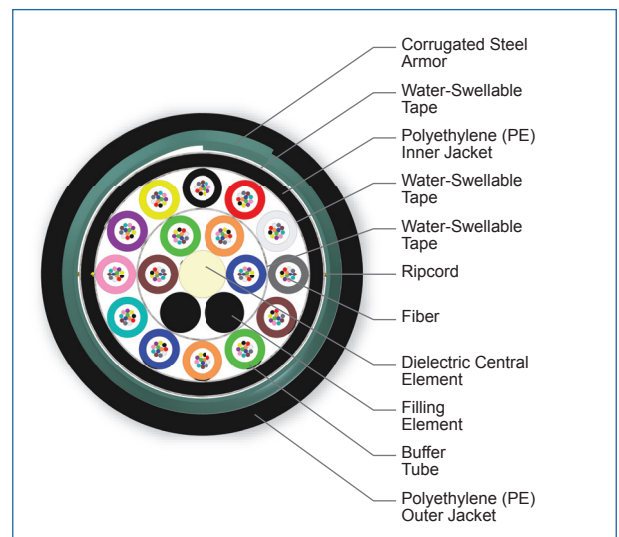

Cross Section of Part Number: 192KU5-T4130F20

ALTOS® Low-Temperature, Loose Tube, Gel-Free, Double-Jacket, Single-Armored Cable

192 F, 62.5 µm multimode (OM1)

CORNING

Specifications

General Specifications

Environment	Outdoor
Application	Aerial, Direct Buried
Cable Type	Loose Tube
Product Type	Armored
Fiber Category	62.5 µm MM (OM1)

Temperature Range

Storage	-50 °C to 70 °C (-58 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-50 °C to 70 °C (-58 °F to 158 °F)

Cable Design

Central Element	Dielectric
Fiber Count	192
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	18
Number of Active Tubes	16
Buffer Tube Color Coding, Layer 1	Blue, Orange, Green, Brown
Buffer Tube Diameter	2.5 mm (0.1 in)
Number of Filling Elements	2
Tape	Water-swellaable
Buffer Tube Color Coding, Layer 2	Slate, White, Red, Black, Yellow, Violet, Rose, Aqua, Blue*, Orange*, Green*, Brown*
Tape, Layer 2	Water-swellaable
Inner Jacket Material	Polyethylene (PE)
Tape, Layer 3	Water-swellaable
Tensile Strength Elements and/or Armoring - Layer 1	Corrugated steel tape armor
Number of Ripcords	3
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black

Notes: Tubes 13 to 24 include a co-extruded stripe that is white for the black tube and black for all other tube colors.

ALTOS® Low-Temperature, Loose Tube, Gel-Free, Double-Jacket, Single-Armored Cable

192 F, 62.5 µm multimode (OM1)

CORNING

Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	890 N (200 lbf)
Weight	289 kg/km (194 lb/1000 ft)
Nominal Outer Diameter	19.9 mm (0.78 in)
Min. Bend Radius Installation	299 mm (11.8 in)
Min. Bend Radius Operation	199 mm (7.8 in)

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Fiber Specifications

Optical Characteristics (cabled)

Fiber Core Diameter	62.5 µm
Fiber Category	OM1
Fiber Code	K
Performance Option Code	30
Wavelengths	850 nm / 1300 nm
Maximum Attenuation	3.4 dB/km / 1.0 dB/km
Serial 1 Gigabit Ethernet	300 m / 550 m
Serial 10 Gigabit Ethernet	33 m / -
Min. Overfilled Launch (OFL) Bandwidth	200 MHz*km / 500 MHz*km
Minimum Effective Modal Bandwidth (EMB)	220 MHz*km / -

Notes: 1) Improved attenuation and bandwidth options available.
2) Bend-insensitive single-mode fibers available on request.
3) Contact a Corning Customer Care Representative for additional information.

Ordering Information

Part Number	192KU5-T4130F20
Product Description	ALTOS® Low-Temperature, Loose Tube, Gel-Free, Double-Jacket, Single-Armored Cable, 144 F, 62.5 µm multimode (OM1)
EAN Code	4056418163079

ALTOS[®] Low-Temperature, Loose Tube, Gel-Free, Double-Jacket, Single-Armored Cable

192 F, 62.5 μm multimode (OM1)

The CORNING logo is a blue square with the word "CORNING" in white, uppercase, sans-serif font centered inside.

Notes



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks.

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.