

# ALTOS® Loose Tube, Gel-Filled Cable

192 F, 50 µm multimode (OM2)

CORNING

Corning ALTOS® all-dielectric cables are lightweight cables designed for duct and aerial (lashed) installation. The loose tube design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber.

## Features and Benefits

**Flexible, craft-friendly buffer tubes**  
Facilitate easy routing in closures

**SZ-stranded, loose tube design**  
Isolates fibers from installation and environmental rigors and facilitates mid-span access



**Dielectric central strength member**  
No preferential bend and requires no bonding or grounding

**Medium-density polyethylene jacket**  
Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

## Standards

**Approvals and Listings** USDA Rural Development Programs

**Design and Test Criteria** Telcordia GR-20, ICEA-640

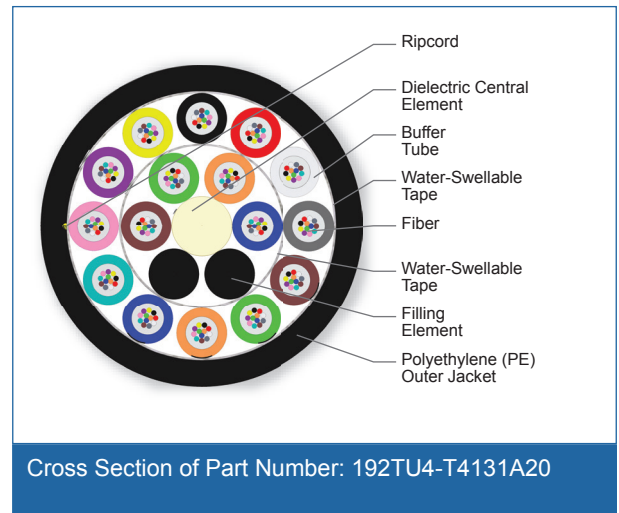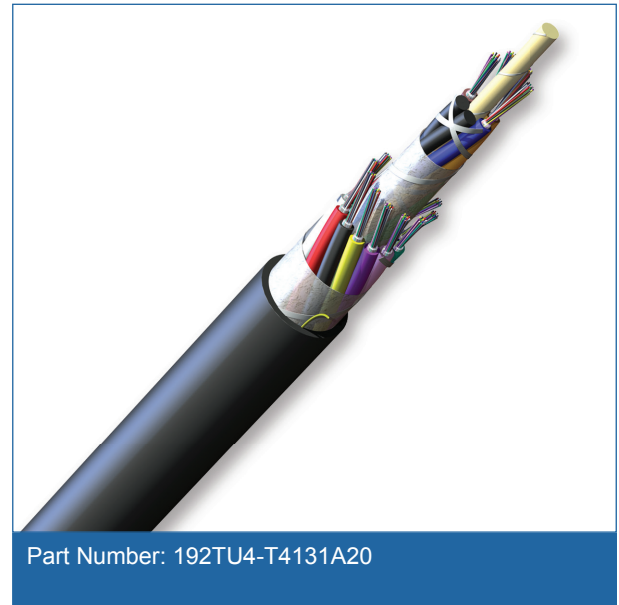

## Specifications

General Specifications	
Environment	Outdoor
Application	Aerial, Duct
Cable Type	Loose Tube

CORNING

# ALTOS® Loose Tube, Gel-Filled Cable

192 F, 50 µm multimode (OM2)

CORNING

## General Specifications

Product Type	Dielectric
Fiber Category	50 µm MM (OM2)

## Temperature Range

Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

## Cable Design

Central Element	Dielectric
Fiber Count	192
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	18
Number of Active Tubes	16
Buffer Tube Color Coding, Layer 1	Blue, Orange, Green, Brown
Buffer Tube Diameter	2.5 mm (0.1 in)
Number of Filling Elements	2
Tape	Water-swellaable
Buffer Tube Color Coding, Layer 2	Slate, White, Red, Black, Yellow, Violet, Rose, Aqua, Blue*, Orange*, Green*, Brown*
Tape, Layer 2	Water-swellaable
Number of Ripcords	1
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black
Maximum Fibers per Tube	12

Notes: Tubes 13 to 24 include a co-extruded stripe that is white for the black tube and black for all other tube colors.

## Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	890 N (200 lbf)
Weight	169 kg/km (113 lb/1000 ft)
Nominal Outer Diameter	16.0 mm (0.63 in)

CORNING

# ALTOS® Loose Tube, Gel-Filled Cable

192 F, 50 µm multimode (OM2)

CORNING

## Mechanical Characteristics Cable

Min. Bend Radius Installation	240 mm (9.4 in)
Min. Bend Radius Operation	160 mm (6.3 in)

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	-----------------------------------------------------------

## Fiber Specifications

### Optical Characteristics (cabled)

Fiber Core Diameter	50 µm
Fiber Category	OM2
Fiber Code	T
Performance Option Code	31
Wavelengths	850 nm / 1300 nm
Maximum Attenuation	3.0 dB/km / 1.0 dB/km
Serial 1 Gigabit Ethernet	750 m / 500 m
Serial 10 Gigabit Ethernet	150 m / -
Min. Overfilled Launch (OFL) Bandwidth	700 MHz*km / 500 MHz*km
Minimum Effective Modal Bandwidth (EMB)	950 MHz*km / -

Notes: 1) 50 µm multimode fiber macrobend loss  $\leq 0.2$  dB at 850 nm for two turns around 7.5 mm radius mandrel.  
2) Improved attenuation and bandwidth options available.  
3) Bend-insensitive single-mode fibers available on request.  
4) Contact a Corning Customer Care Representative for additional information.

## Ordering Information

Part Number	192TU4-T4131A20
Product Description	ALTOS® Loose Tube, Gel-Filled Cable, 192 F, 50 µm multimode (OM2)
EAN Code	4056418166834

CORNING

# ALTOS® Loose Tube, Gel-Filled Cable

192 F, 50 µm multimode (OM2)

CORNING

## Notes



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks).

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

CORNING