

# ALTOS® Low-Temperature, Loose Tube, Gel-Free Cable

216 F, 62.5 µm multimode (OM1)

CORNING

Corning ALTOS® gel-free, low-temperature cables are designed for extreme cold temperature environments with an extended operating range of -50° to +70°C (-58° to +158°F). Dielectric jackets allow for duct or aerial (lashed) installation.

## Features and Benefits

**Extended operating temperature range of -50° to +70°C (-58° to +158°F)**

Allows for operation at extreme low temperatures

**Flexible, craft-friendly buffer tubes**


Facilitate easy routing in closures

**Gel-free waterblocking technology**

Craft-friendly cable preparation

**Medium-density polyethylene jacket**

Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

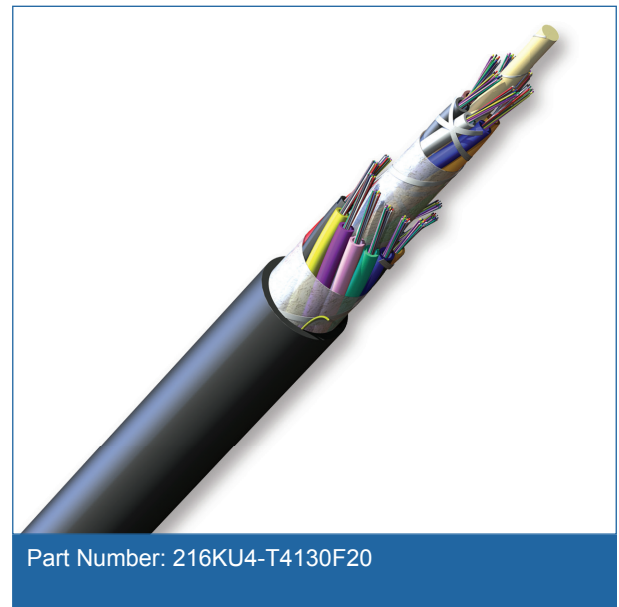


## Standards

**Approvals and Listings** USDA Rural Development Programs

**Common Installations** Outdoor duct and aerial

**Design and Test Criteria** Telcordia GR-20, ICEA-640

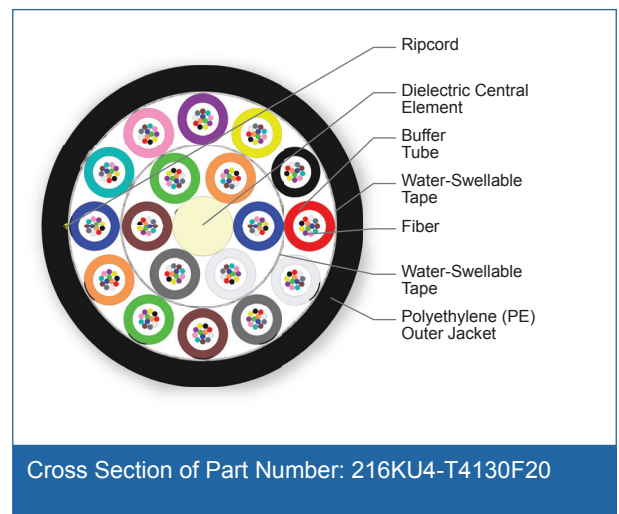

## Specifications

General Specifications	
Environment	Outdoor
Application	Aerial, Duct
Cable Type	Loose Tube

# ALTOS<sup>®</sup> Low-Temperature, Loose Tube, Gel-Free Cable

216 F, 62.5  $\mu$ m multimode (OM1)

CORNING

## General Specifications

Product Type	Dielectric
Fiber Category	62.5 $\mu$ m MM (OM1)

## Temperature Range

Storage	-50 °C to 70 °C (-58 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-50 °C to 70 °C (-58 °F to 158 °F)

## Cable Design

Central Element	Dielectric
Fiber Count	216
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	18
Number of Active Tubes	18
Buffer Tube Color Coding, Layer 1	Blue, Orange, Green, Brown, Slate, White
Buffer Tube Diameter	2.5 mm (0.1 in)
Tape	Water-swellable
Buffer Tube Color Coding, Layer 2	Red, Black, Yellow, Violet, Rose, Aqua, Blue*, Orange*, Green*, Brown*, Slate*, White*
Tape, Layer 2	Water-swellable
Number of Ripcords	1
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black

Notes: Tubes 13 to 24 include a co-extruded stripe that is white for the black tube and black for all other tube colors.

## Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	890 N (200 lbf)
Weight	147 kg/km (99 lb/1000 ft)
Nominal Outer Diameter	16 mm (0.63 in)
Min. Bend Radius Installation	240 mm (9.4 in)
Min. Bend Radius Operation	160 mm (6.3 in)

# ALTOS® Low-Temperature, Loose Tube, Gel-Free Cable

216 F, 62.5 µm multimode (OM1)

CORNING

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

## Fiber Specifications

### Optical Characteristics (cabled)

Fiber Core Diameter	62.5 µm
Fiber Category	OM1
Fiber Code	K
Performance Option Code	30
Wavelengths	850 nm / 1300 nm
Maximum Attenuation	3.4 dB/km / 1.0 dB/km
Serial 1 Gigabit Ethernet	300 m / 550 m
Serial 10 Gigabit Ethernet	33 m / -
Min. Overfilled Launch (OFL) Bandwidth	200 MHz*km / 500 MHz*km
Minimum Effective Modal Bandwidth (EMB)	220 MHz*km / -

Notes: 1) Improved attenuation and bandwidth options available.  
2) Bend-insensitive single-mode fibers available on request.  
3) Contact a Corning Customer Care Representative for additional information.

## Ordering Information

Part Number	216KU4-T4130F20
Product Description	ALTOS® Low-Temperature, Loose Tube, Gel-Free Cable, 216 F, 62.5 µm multimode (OM1)
EAN Code	4056418162904



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

CORNING