


Data sheet

OpDAT mini breakout cable 12x1 OM3 - bend insensitive, class D_{ca} s1 d0 a1


P/N 150M12500000M
EAN 4250184145431

2018-09-01

Illustrations

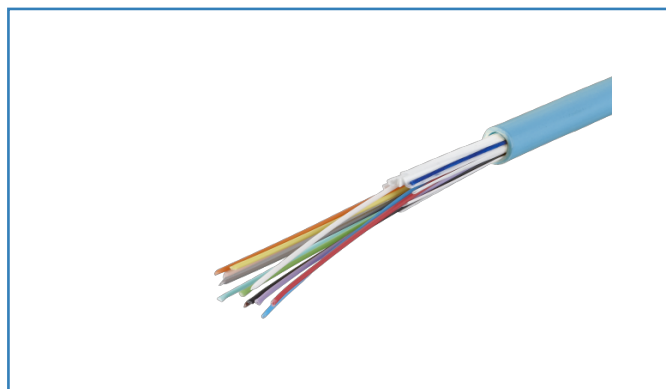

Principle diagram

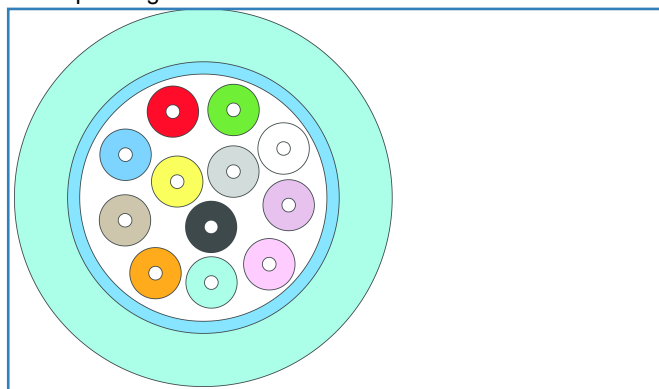

See enlarged drawings at the end of document



Product specification

- mini-breakout installation cable U-VQ(ZN)H
- laser-optimized, bend insensitive fiber
- UV-resistant, metal-free, waterproof and moisture-resistant
- longitudinally water blocked and suitable for operation down to -40 °C
- cable sheath: LSHF-FR (low smoke halogen free - flame retardant)
- cable structure: 4, 12 or 24 tight buffered fibers (dia. 0.9 mm)
- strain relief: glasroving elements
- to be laid in tubes and cable ducts indoors and outdoors
- applicable standards: EN 50173-1, ISO 11801 2nd edition, IEC 60794-2, IEC 60794-2-20, EN 187000
- fire behaviour: Class Dca s2 d2 a1 acc. to EN 50399 (classification acc. to EN 13501-6)

variants:

number of OM3 fibers

12



Technical Data

General Data

Fields of application	Structured building cabling, Office Fiber to the Desk, Data center
Design	Installation cables
Transmission technology	Fiber optic
Color	aqua
Color coding fiber/ wire(s)	see table
Mode type of the fiber	Multimode
Fiber class	OM3 (ISO/IEC 11801/EN 50173 & IEC 60793-2-10/EN 60793-2-10 A1.a.2)
Cable Type	Mini breakout
Number of cables/ cores	1
Number of fibres each cable/ wire	12
Fiber construction	50/125 µm
Weight	48.00 kg/km

Connections/interfaces

Connector technology interface 1	Free line end
Connector technology interface 2	Free line end
Cable sheath diameter (min. - max.)	
Cable sheath diameter	6.90 mm
Cable sheath diameter	0.236 in.

Optical characteristics

Attenuation of the fiber	
Attenuation of the fiber in the cable at 850 nm	max. 3.0 dB/km
Attenuation of the fiber in the cable at 1300 nm	max. 1.0 dB/km

Mechanical characteristics

strain relief	glasrooving elements
Maximum installation load (max.)	900 N
Maximum installation load	50.00 mm
Maximum installation load	1.969 in.
Impact resistance	10 J
Crush (compressive strength)	2000 N
Fire load	765 MJ/km



Technical Data

Materials and material properties

Material - Cable jacket	LSHF-FR
Bend insensitivity	yes
Flame retardancy	yes
Halogen free	yes
Metallfrei	yes
UV-resistance	yes
Longitudinal water tightness	yes

Environmental conditions

Temperature (min. - max.)	
Temperature - Storage °C	-40 - 70 °C
Temperature - Storage °F	-40 - 158 °F
Temperature - Operating °C	-40 - 70 °C
Temperature - Operating °F	-40 - 158 °F
Temperature - Installation °C	-20 - 60 °C
Temperature - Installation °F	-4 - 140 °F

Approvals

RoHS	compliant
------	-----------

The product meets the following standards

Generic cabling systems	
General requirements	ISO/IEC 11801
Optical fibers: Product specifications	
Sectional specification for category A1 multimode fibres	ISO/IEC 60793-2-10 (A1a.2)
Optical fibers: Generic specification	
Cross reference table for optical cable test procedures	ISO/IEC 60794-1-2
Test on gases evolved during combustion of materials from cables	
Determination of the halogen acid gas content	IEC 60754-1
Determination of acidity (by measuring the pH value) and conductivity	IEC 60754-2



Data sheet

Page 4/9

OpDAT mini breakout cable 12x1 OM3 - bend insensitive, class

D_{ca} s1 d0 a1

P/N

150M12500000M

EAN 4250184145431

2018-09-01

Technical Data

The product meets the following standards

Tests on electric and optical fibre cables under fire conditions

Test for vertical flame propagation for a single insulated wire or cable	ISO/IEC 60332-1-2
Test for vertical flame spread of vertically-mounted bunched wires or cables	ISO/IEC 60332-3-24
Measurement of smoke density of cables burning	ISO/IEC 61034
Common test methods for cables under fire conditions	
Fire behaviour - class	fire behaviour: Class D _{ca} s1 d0 a1 acc. to EN 50399 (classification acc. to EN 13501-6)
ITU-T standard	G.651.1
TIA/ANSI-492	AAAC

Classifications

ETIM 5.0	EC000034
----------	----------

Packing details

Type of packaging	1 meter / plastic bag
Packaging dimension (W x H x D)	300.00 x 200.00 x 50.00 mm
Packaging dimension (W x H x D)	11.811 x 7.874 x 1.969 in.



Data sheet

Page 5/9

OpDAT mini breakout cable 12x1 OM3 - bend insensitive, class

P/N

D_{ca} s1 d0 a1


150M12500000M

EAN 4250184145431

2018-09-01

Illustrations

Principle diagram

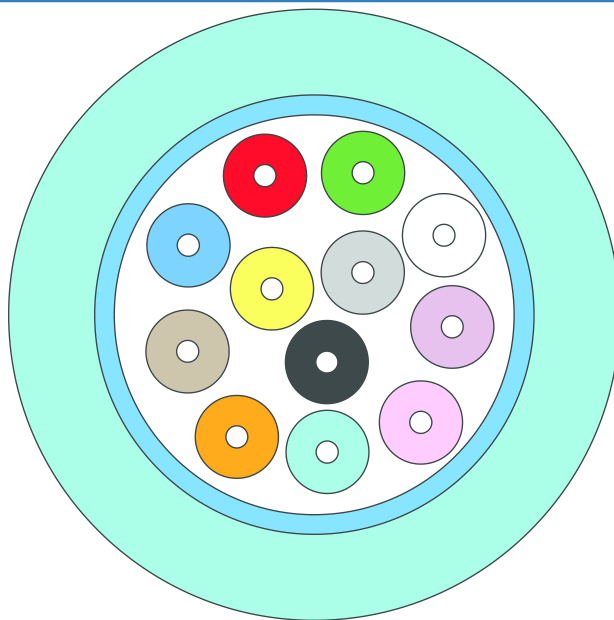

Data sheet

Page 6/9

OpDAT mini breakout cable 12x1 OM3 - bend insensitive, class

P/N

D_{ca} s1 d0 a1

150M12500000M

EAN 4250184145431

2018-09-01

Fiber color coding

Fiber color code		
	1	red
	2	green
	3	blue
	4	yellow
	5	white
	6	grey
	7	brown
	8	violet
	9	turquoise
	10	black
	11	orange
	12	pink



Technical Data

General Data

Transmission technology	Fiber optic
Mode type of the fiber	Multimode
Fiber class	OM3 (ISO/IEC 11801/EN 50173 & IEC 60793-2-10/EN 60793-2-10 A1.a.2)
Fiber construction	50/125 μ m

Transmission characteristics

Transmission rate up to 10 GBit	IEEE 802.3an
Transmission rate up to 100 GBit	IEEE 802.3ba
Reach	
Reach 1000BASE LX	550 m
Reach 1000BASE SX	1000 m
Overfilled (OFL) modal bandwidth at 850 nm (min.)	1500 MHz * km
Overfilled (OFL) modal bandwidth at 1300 nm (min.)	500 MHz * km
Effective modal bandwidth (EMB) at 850 nm (min.)	2000 MHz * km

Connections/interfaces

Connector technology interface 1	Free line end
Connector technology interface 2	Free line end
Fiber core diameter	50 \pm 2 μ m
Core-/ Fiber cladding diameter	125.0 \pm 1.0 μ m
Primary coating diameter - colored	250 \pm 15 μ m
Primary coating diameter - uncolored	242 \pm 5 μ m

Optical characteristics

Attenuation of the fiber	
Attenuation of the fiber in the cable at 850 nm	max. 2.5 dB/km
Attenuation of the fiber in the cable at 1300 nm	max. 0.8 dB/km
Maximum value of cable attenuation at 850 nm	3.0 dB/km
Maximum value of cable attenuation at 1300 nm	1.0 dB/km

Mechanical characteristics

Proof stress level	min. 0.7 (~ 1 %) GPa
Typische durchschnittliche Abziehkraft	1.7 N
Strip force (peak)	1.3 \leq F _{peak.strip} \leq 8.9 N
Fiber cladding non-circularity	max. 0.7 %

Technical Data

Mechanical characteristics

Core non-circularity	max. 5 %
Core (MDF)-cladding concentricity error	max. 1 µm
Primary coating concentricity error	max. 5 %
Primary coating-cladding concentricity error	max. 6
Inhomogeneity of OTDR measurement report at 1310 nm und 1550 nm	max. 0.1 dB/km
Group refractive index	
Gruppen-Brechungsindex bei 850 nm	1.482
Gruppen-Brechungsindex bei 1300 nm	1.477
Numerical aperture	0.200 ± 0.015

Materials and material properties

Bend insensitivity	yes
--------------------	-----

The product meets the following standards

Generic cabling systems	
General requirements	ISO/IEC 11801 cat. OM3 TIA/EIA 568-C
Data centers	ISO/IEC 24764
Optical fibers: Measuring methods and test procedures	
Fibre geometry	ISO/IEC 60793-1-20
Coating geometry	ISO/IEC 60793-1-21
Length measurement	ISO/IEC 60793-1-22
Fibre proof test	ISO/IEC 60793-1-30
Coating strippability	ISO/IEC 60793-1-32
Attenuation	ISO/IEC 60793-1-40
Bandbreite	ISO/IEC 60793-1-41
Numerical aperture	ISO/IEC 60793-1-43
Gruppenlaufzeitdifferenz	ISO/IEC 60793-1-49
Optical fibers: Product specifications	
Sectional specification for category A1 multimode fibres	ISO/IEC 60793-2-10 (A1a.2)
ITU-T standard	G.651.1
TIA/ANSI-492	AAAC



Technical Data

Packing details

Type of packaging	0
Packaging dimension (W x H x D)	0.00 x 0.00 x 0.00 mm

