

# EDGE™ Trunk Cable

Bend-improved Single-mode (OS2), MTP® Connector to MTP Connector, 96 F, with 33/33 inch legs, pulling grip one side, 100 ft

CORNING

EDGE™ MTP® trunks provide the backbone of the EDGE Solution. With non-pinned MTP connectors on both ends of the cable, the trunks are designed to interface with EDGE or Plug & Play™ modules. All trunks are shipped with strain-relief clips that allow for tool-less installation in both EDGE and Plug & Play housings. The trunks conform to TIA-568 Type-B polarity.

## Features and Benefits

### High-density trunk cables

Allow tighter trunk cable bends for slack storage and routing

### Low insertion loss performance


Allows for more connections in a link when deploying a TIA-942-compliant system

### Universal wired components

Enable moves, adds and changes without polarity concerns; provide a simple migration path between 2-fiber and parallel optic applications

### Factory-terminated solutions

Provide consistent quality, ensure system performance, and reduce installation time

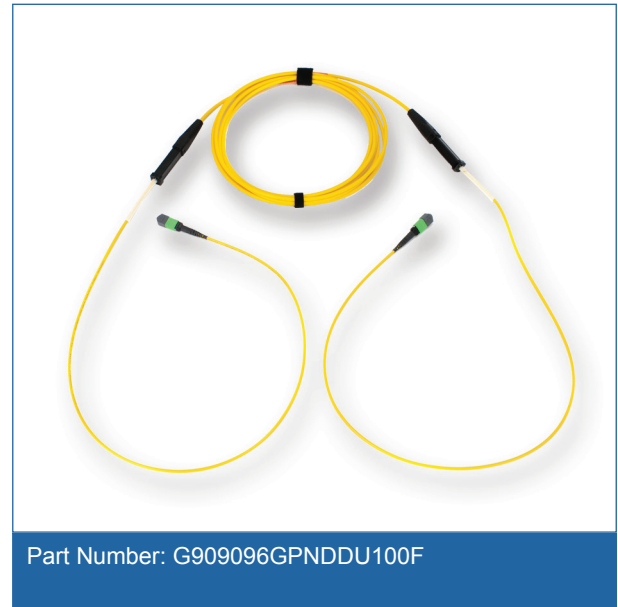

## Standards

**Approvals and Listings** NFPA 262, National Electrical Code® (NEC®), OFNP, CSA FT-6

## Specifications

General Specifications	
Application	Data Center LAN/SAN
Cable Type	Indoor; ANSI/ICEA S-83-596
Flame Rating	Plenum (OFNP)
Cable Assembly Type	EDGE™ Trunk
Fiber Category	Bend-improved SM (OS2)

# EDGE™ Trunk Cable

Bend-improved Single-mode (OS2), MTP® Connector to MTP Connector, 96 F, with 33/33 inch legs, pulling grip one side, 100 ft

CORNING

## Temperature Range

Operation	-10 °C to 60 °C (14 °F to 140 °F)
-----------	-----------------------------------

## Design - Connector A

Connector Type	MTP® (non-pinned)
Ferrule Material	Composite

## Optical Specifications - Connector A

Insertion Loss, Max.	0.75 dB
Reflectance	< -55 dB

## Design - Connector B

Connector Type	MTP® (non-pinned)
Ferrule Material	Composite

## Optical Specifications - Connector B

Insertion Loss, Max.	0.75 dB
Reflectance	< -55 dB

## Cable Design

Fiber Count	96
Outer Jacket Color	Yellow
Polarity	Universal; TIA-568 Type-B
Strain-Relief Bracket Type	2

## Mechanical Characteristics Cable

Nominal Outer Diameter	11.9 mm ± 0.3 mm (0.47 in)
Min. Bend Radius Installation	178.5 mm (7.03 in)
Min. Bend Radius Operation	59.5 mm (2.34 in)
Max. Tensile Strength for Installation	660 N

# EDGE™ Trunk Cable

Bend-improved Single-mode (OS2), MTP® Connector to MTP Connector, 96 F, with 33/33 inch legs, pulling grip one side, 100 ft



## Mechanical Characteristics Cable

Weight	111 kg/km (74 lb/1000 ft)
Minimum Conduit Size with 18-in Elbow	3.0 in

## Furcation - Connector A

Leg Length	838 mm (-0 mm/+76 mm) for EDGE™ housings (33 in (-0 in/+3 in))
Leg Color	Yellow
Leg Diameter	2.0 mm
Furcation Type - A	EDGE™ Size 2; 20 mm x 20 mm x 108.6 mm

## Furcation - Connector B

Leg Length	838 mm (-0 mm/+76 mm) for EDGE™ housings (33 in (-0 in/+3 in))
Leg Color	Yellow
Leg Diameter	2.0 mm
Furcation Type - B	EDGE™ Size 2; 20 mm x 20 mm x 108.6 mm

## Pulling Grip - Connector A

Pulling Grip - Connector A	Yes
Pulling Grip Outer Diameter	56 mm (2.2 in)
Min. Duct Size Diameter	89 mm (3.5 in)
Tensile Strength	440 N (100 lb)

## Pulling Grip - Connector B

Pulling Grip - Connector B	No
----------------------------	----

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

# EDGE™ Trunk Cable

Bend-improved Single-mode (OS2), MTP® Connector to MTP Connector, 96 F, with 33/33 inch legs, pulling grip one side, 100 ft



## Fiber Specifications

Optical Characteristics (cabled)	
Fiber Type	Single-Mode Ultra-Bendable Fiber
Fiber Core Diameter	8.2 μm
Fiber Category	OS2
Fiber Compliance	ITU-T G.652.D and ITU-T G.657.A1
Fiber Code	G
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km
Serial 1 Gigabit Ethernet	5000 m / - / -
Serial 10 Gigabit Ethernet	10000 m / - / 40000 m
Induced Attenuation @ 10 mm Radius	0.5 dB (1 turn; 10 mm radius; 1550 nm)

\* ITU-T G.652 D compliant.

\* Meets 0.75 ns optical skew when used in all Corning Plug and Play™/EDGE™ systems solutions.

Notes: 1) Improved attenuation and bandwidth options available.  
2) Bend-insensitive single-mode fibers available on request.  
3) Contact a Corning Customer Care Representative for additional information.

## Ordering Information

Part Number	G909096GPNDU100F
Product Description	EDGE™ Solutions Trunk Cable, Bend-improved Single-mode (OS2), MTP® Connector to MTP Connector, 96 F, with 33/33 inch legs, pulling grip one side, 100 ft
EAN Code	4056418687780
Weight	4.7 kg (10.3 lb)
Length	100 ft (-0 ft/+2 ft) (30 m (-0 m/+0.61 m))

## Shipping Information

Units per Delivery	1/1
Reel Diameter	23.5 in
Reel Width	5 in

# EDGE™ Trunk Cable

Bend-improved Single-mode (OS2), MTP® Connector to MTP Connector, 96 F, with 33/33 inch legs, pulling grip one side, 100 ft

The CORNING logo is displayed in white, uppercase letters within a solid blue square.

## Notes



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks).

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.