

# LANS Housing, partially loaded, without pigtails, LC Duplex

48 fibres, 1U, 50 µm multimode (OM3), standard tray, crimp splice protection

CORNING

The modular and multifunctional LANS housing family was designed for various applications in 19-in racks and main distribution frames. The sliding and tilting LANScape® LANS housings can be equipped with industry common adapter types in different fibre categories and are suitable for direct field termination, fusion splicing with pigtails as well as preterminated solutions. The modular front allows for mixed media fibre and copper installations of modules in LANScape format. The two modular back openings can accommodate additional accessories, such as cable glands, cable strain relief for FTDD/FTTO applications or U-Clips for Plug & Play™ and EDGE™ trunks. Enabling a simple exchange of adapter modules during moves, adds and changes (MACs) the modular housings reduce the risk of network disruptions.

## Features and Benefits

Modular front allows to exchange and mix different adapter types and fibre categories

LC Duplex adapter modules with selfclosing shutters are standard at no extra cost

Quick-mount feature allows for easy and accurate single-person installation

Modular back openings allow to strainrelief different cable types, such as brackets for cable glands, furcation heads of preterminated cables, copper cables and low fibre count cables (max. 16)


Suitable for fusion splicing with pigtails, preterminated solutions and Plug & Play™ /EDGE™ trunks, field-termination with UniCam connectors and FutureCom™ copper jacks in LANScape Format

Port numbering above and below the ports

Space above the ports can be used for customised labelling

Available in three colours: black, grey and now also with silver front

Housings are available empty (1U or 2U) or preloaded with or without pigtails

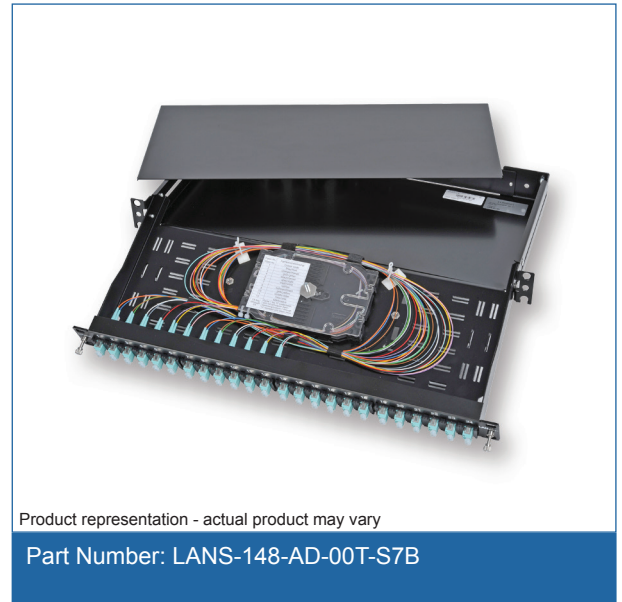

Product representation - actual product may vary

Part Number: LANS-148-AD-00T-S7B

# LANS Housing, partially loaded, without pigtails, LC Duplex

48 fibres, 1U, 50 µm multimode (OM3), standard tray, crimp splice protection

CORNING

## Specifications

General Specifications	
Application	Splicing, preterminated cables, field connectorization
Mounting type	Rack 19"
Mounting Technology	Flush mount
Access type	Front access downward tiltable
Lockable	No
Fibre Category	50 µm MM (OM3)

Temperature Range	
Operation	-20 °C to 60 °C
Installation and assembly	-5 °C to 50 °C
Storage Temperature	-25 °C to 70 °C

Design - Hardware	
Housing material	High-grade steel
Cable entry type	slotted for cable glands angled
Height Unit	1U
Fibre Count	48
Number Of Ports	24
Number of adapters	24
Number of splice trays	4
Splice tray type	standard with oragnizer for crimp splice protectors
Number of splice protectors	48
Splice Protectors Type	Crimp

Mechanical Characteristics	
Dimensions (HxWxD)	44 mm x 483 mm x 213 mm
Weight	2.66 kg

Design Adapter	
Adapter type	LC duplex shuttered
Adapter housing material	Composite

# LANS Housing, partially loaded, without pigtails, LC Duplex

48 fibres, 1U, 50 µm multimode (OM3), standard tray, crimp splice protection



## Design Adapter

Adapter housing colour	Turquoise
Insert Material	Ceramic
Keyed adapter	No
Shuttered adapter	Yes

## Ordering Information

Part Number	LANS-148-AD-00T-S7B
Product Description	LANS 19" Patch Panel, 1U, black, 24 LC duplex shuttered, turquoise OM3, standard tray, crimp splice protection
EAN Code	4056418693118

## Shipping Information

Units Per Delivery	1/1
Shipping Weight	3.46 kg



Corning Optical Communications GmbH & Co. KG · Leipziger Strasse 121 · 10117 Berlin, GERMANY  
00 800 2676 4641 · FAX: +49 30 5303 2335 · [www.corning.com/opcomm/emea](http://www.corning.com/opcomm/emea)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/emea/trademarks](http://www.corning.com/opcomm/emea/trademarks). Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2016 Corning Optical Communications. All rights reserved.