

LANS/LANC Splice Packs, LC


MM/OM4, universal splice tray, for heat-shrink and crimp splice protectors (violet boots)

CORNING

The universal splice packs are matched to the LANScape® Solutions LANC and LANS housings, which provide up to 96 fibre* (48 port) capacity for LC duplex connectivity and 48 fibre* (48 port) capacity for SC duplex or ST® compatible connectivity in 1 height unit.

Features

- Universal splice cassettes including cover
- 12 coloured pigtails per cassette
- 900 µm TB (Easy Strip) pigtails; fibre pre-stripped to 250 µm
- Telcordia colour-coded on both 900 µm and 250 µm layers
- Pigtails are 2 m long, 0.8 m 900 µm and 1.2 m 250 µm
- Splice organiser for heatshrink and/or crimp
- Max. 4 cassettes per 1U LANC housing

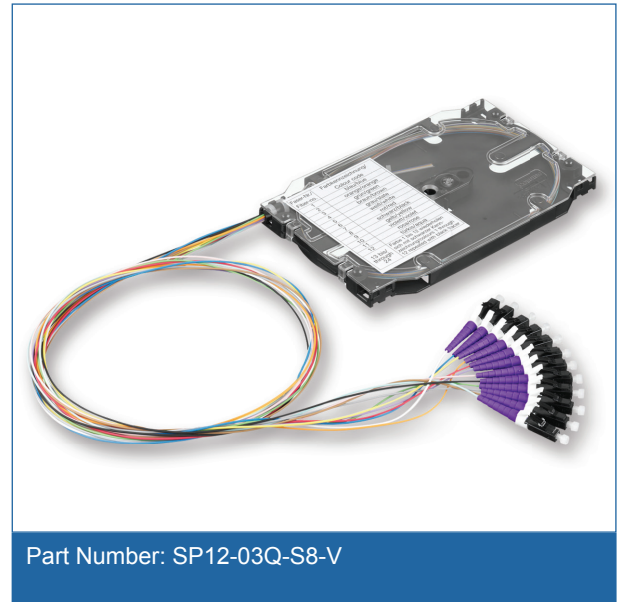

Part Number: SP12-03Q-S8-V

Specifications

General Specifications

Application	Splicing
Fibre Category	50 µm MM (OM4)
Product category	Core product

Temperature Range

Operation	-20 °C to 60 °C
Installation and assembly	-5 °C to 50 °C
Storage	-25 °C to 70 °C

Design - Hardware

Fibre Count	12
Number of pigtails	12
Number of pigtail bundles	1
Pigtail length	2 m
Connector Type	LC

LANS/LANC Splice Packs, LC

MM/OM4, universal splice tray, for heat-shrink and crimp splice protectors (violet boots)

CORNING

Design - Hardware

Pigtail Type	Bundle colour coded to telcordia on primary and secondary coating
Number of splice trays	1
Splice tray type	Universal cassette with organisers for heat-shrink and crimp splice protectors
Splice Protectors Type	Heat-shrink or crimp protectors

Mechanical Characteristics

Weight	0.7 kg
Dimensions (HxWxD)	10 mm x 140 mm x 90 mm

Optical Specification - Hardware

Pigtail insertion loss	0.35 dB
------------------------	---------

Ordering Information

Part Number	SP12-03Q-S8-V
Product Description	LANS/LANC Splice Packs, LC, MM/OM4, universal splice tray, for heat-shrink and crimp splice protectors (violet boots)
EAN Code	4056418141152

Shipping Information

Packing dimensions (L x W x H)	280 mm x 280 mm x 77 mm
Shipping Weight	1 kg
Units Per Delivery	4/1



Corning Optical Communications GmbH & Co. KG · Leipziger Strasse 121 · 10117 Berlin, GERMANY
00 800 2676 4641 · FAX: +49 30 5303 2335 · www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2016 Corning Optical Communications. All rights reserved.